



50 HZ DE-ICER

OVERVIEW


- Complete package includes assembled motor unit, 6m mooring lines, rubber 10m or 30m power cord or 1m stub cord
- CE Marked
- Saltwater compatible
- Packaged for convenient shipping

MOTOR UNIT

- 1/2, 3/4, or 1HP motor, 230V single phase
- 1450 RPM
- Oil cooled
- Continuous duty rated
- Long-life bearings
- Thermal overload protection
- Fully utilized heavy-duty carbon ceramic mechanical seal
- Series 300 stainless steel can
- Engineering grade thermoplastic top
- Sacrificial anode installed on 316 stainless steel shaft
- Custom engineered UV-resistant thermoplastic propeller
- Coated stainless steel cage


POWER CABLE

- 10m or 30m power cord or 1m stub cord
- Rubber jacket, 3-conductor power cord with earth conductor
- Potted quick disconnect and stainless steel strain relief standard on all stub cords
- Flex sleeve cord protection on stub option

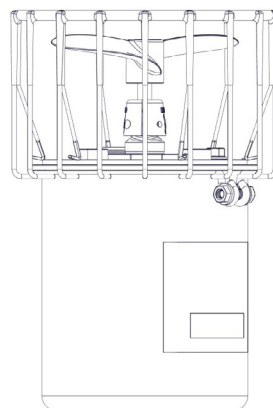


MOUNT OPTIONS

- Universal Dock Mount
 - Complete 300-series stainless steel construction
 - Multiple angling options
 - User supplies 25mm pipe, up to 3m long
- Industrial Dock Mount
 - Complete 300-series stainless steel construction
 - Multiple angling options
 - User supplies 25mm pipe, up to 3m long

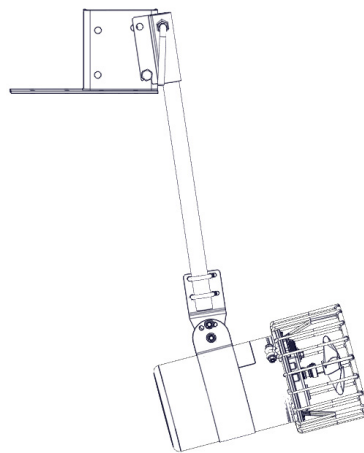

Universal Mount



Industrial Mount

50 HZ DE-ICER


OVERVIEW

Model	HP	Voltage / Phase / Hz	Amperage	Locked Rotor Amps	Thrust (kg.)	Min. Depth of Operation*
2400ED	1/2	230 / 1 / 50	2.2	5.3	11.8	1.2m
3400ED	3/4	230 / 1 / 50	3.5	9	13.4	1.2m
4400ED	1	230 / 1 / 50	3.7	10	16.8	1.2m

*Will operate in less depth but may cause bottom disturbance.

WIRE SIZE

	Cord Length			
	10m	30m	60m	90m
2400ED	1.5mm ²	1.5mm ²	2.5mm ²	2.5mm ²
3400ED	1.5mm ²	1.5mm ²	2.5mm ²	2.5mm ²
4400ED	1.5mm ²	1.5mm ²	2.5mm ²	4mm ²

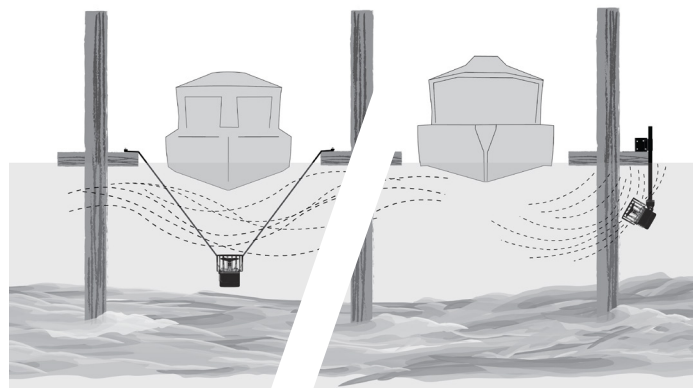

Vertical suspension

Dock & piling mount